



Pescador PILOT 12

SILENT TRACTION PAD KIT

INSTALLATION INSTRUCTIONS

THINGS YOU'LL NEED:

- Rubbing Alcohol or Acetone
- Masking Tape
- Razor Knife
- Hair Dryer
- Roller

SURFACE PREPARATION FOR BEST ADHESION:

Using rag with rubbing alcohol or acetone, scrub surface area to remove all dirt, mildew, oil and other substances.

INSTALLATION:

STEP 1: Before applying pads, layout each location on boat to confirm proper fit.

STEP 2: Using the razor knife, carefully cut a line down the center of the paper backing. DO NOT cut through the pad material itself. This will allow the paper backing to be peeled off in two sections for a more controlled application.

STEP 3: The adhesive backing bonds best at temperatures of 70 degrees Fahrenheit or higher and in low humidity. Using a hair dryer to warm the kayak surface area just before application will help to remove any moisture and promote better adhesion. Be careful not to melt the plastic.


STEP 4: Using masking tape, secure one end of pad in desired location to prevent it from shifting.

STEP 5: Remove paper backing from non-taped end/half and carefully position it into place by applying pressure. Be careful not to pull the pad while in position. Pulling will cause the pad material to stretch and not line up correctly.

STEP 6: Once un-taped end is in position and adhered, remove backing paper (and masking tape) from other end and repeat.

STEP 7: After each pad has been fully adhered on both ends, use a roller to apply downward pressure. This will remove any air bubbles and increase the overall surface bond.

IMPORTANT: Exposure to the sun's UV rays, along with exposure to other elements of nature, will have a negative impact on any material over time. Damage that can occur to pad material due to such exposure includes material breakdown and color fading. Proper storage of your kayak when not in use will prolong the life and colors of your traction pads.

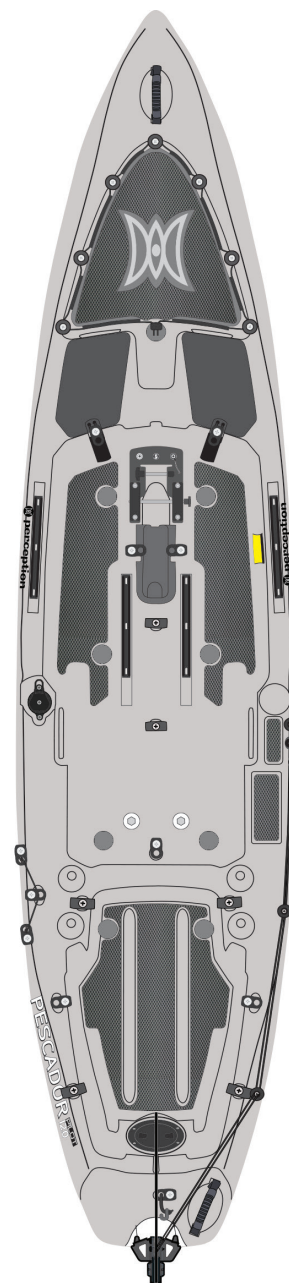

LOOKING FOR HELP? NEED ANSWERS OR ADVICE?

For quickest service, call us at 888-52-KAYAK (888-525-2925), from 9:00 a.m. to 5:00 p.m. ET.

SKU 8080020

#59504328



Pescador PRO 10

SILENT TRACTION PAD KIT

INSTALLATION INSTRUCTIONS

THINGS YOU'LL NEED:

- Rubbing Alcohol or Acetone
- Masking Tape
- Razor Knife
- Hair Dryer
- Roller

SURFACE PREPARATION FOR BEST ADHESION:

Using rag with rubbing alcohol or acetone, scrub surface area to remove all dirt, mildew, oil and other substances.

INSTALLATION:

STEP 1: Before applying pads, layout each location on boat to confirm proper fit.

STEP 2: Using the razor knife, carefully cut a line down the center of the paper backing. DO NOT cut through the pad material itself. This will allow the paper backing to be peeled off in two sections for a more controlled application.

STEP 3: The adhesive backing bonds best at temperatures of 70 degrees Fahrenheit or higher and in low humidity. Using a hair dryer to warm the kayak surface area just before application will help to remove any moisture and promote better adhesion. Be careful not to melt the plastic.


STEP 4: Using masking tape, secure one end of pad in desired location to prevent it from shifting.

STEP 5: Remove paper backing from non-taped end/half and carefully position it into place by applying pressure. Be careful not to pull the pad while in position. Pulling will cause the pad material to stretch and not line up correctly.

STEP 6: Once un-taped end is in position and adhered, remove backing paper (and masking tape) from other end and repeat.

STEP 7: After each pad has been fully adhered on both ends, use a roller to apply downward pressure. This will remove any air bubbles and increase the overall surface bond.

IMPORTANT: Exposure to the sun's UV rays, along with exposure to other elements of nature, will have a negative impact on any material over time. Damage that can occur to pad material due to such exposure includes material breakdown and color fading. Proper storage of your kayak when not in use will prolong the life and colors of your traction pads.

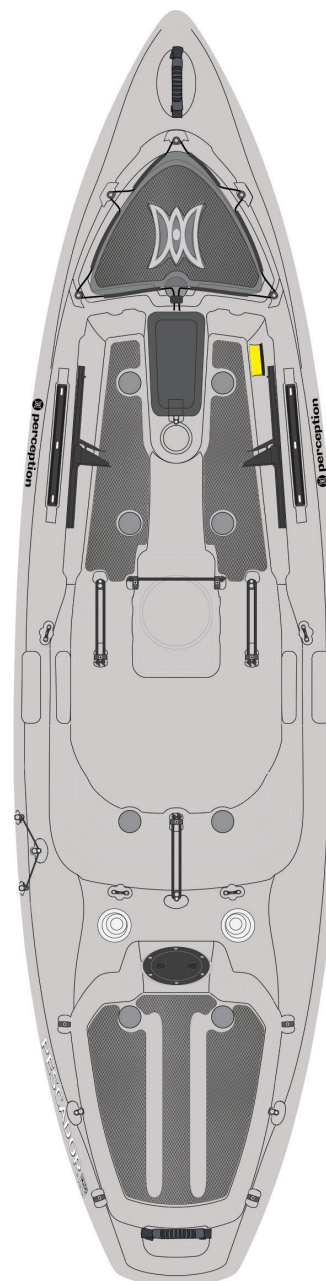

LOOKING FOR HELP? NEED ANSWERS OR ADVICE?

For quickest service, call us at 888-52-KAYAK (888-525-2925), from 9:00 a.m. to 5:00 p.m. ET.

SKU 8080021

#59504329



Pescador PRO 12

SILENT TRACTION PAD KIT

INSTALLATION INSTRUCTIONS

THINGS YOU'LL NEED:

- Rubbing Alcohol or Acetone
- Masking Tape
- Razor Knife
- Hair Dryer
- Roller

SURFACE PREPARATION FOR BEST ADHESION:

Using rag with rubbing alcohol or acetone, scrub surface area to remove all dirt, mildew, oil and other substances.

INSTALLATION:

STEP 1: Before applying pads, layout each location on boat to confirm proper fit.

STEP 2: Using the razor knife, carefully cut a line down the center of the paper backing. DO NOT cut through the pad material itself. This will allow the paper backing to be peeled off in two sections for a more controlled application.

STEP 3: The adhesive backing bonds best at temperatures of 70 degrees Fahrenheit or higher and in low humidity. Using a hair dryer to warm the kayak surface area just before application will help to remove any moisture and promote better adhesion. Be careful not to melt the plastic.


STEP 4: Using masking tape, secure one end of pad in desired location to prevent it from shifting.

STEP 5: Remove paper backing from non-taped end/half and carefully position it into place by applying pressure. Be careful not to pull the pad while in position. Pulling will cause the pad material to stretch and not line up correctly.

STEP 6: Once un-taped end is in position and adhered, remove backing paper (and masking tape) from other end and repeat.

STEP 7: After each pad has been fully adhered on both ends, use a roller to apply downward pressure. This will remove any air bubbles and increase the overall surface bond.

IMPORTANT: Exposure to the sun's UV rays, along with exposure to other elements of nature, will have a negative impact on any material over time. Damage that can occur to pad material due to such exposure includes material breakdown and color fading. Proper storage of your kayak when not in use will prolong the life and colors of your traction pads.

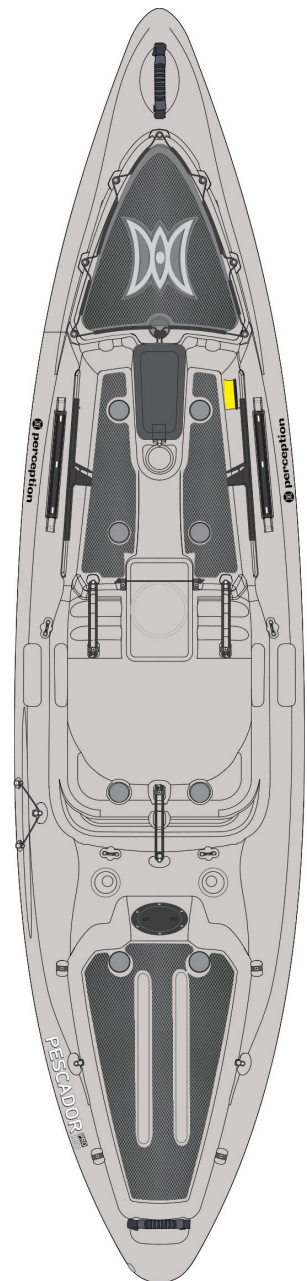

LOOKING FOR HELP? NEED ANSWERS OR ADVICE?

For quickest service, call us at 888-52-KAYAK (888-525-2925), from 9:00 a.m. to 5:00 p.m. ET.

SKU 8080022

#59504330

Pescador 10

SILENT TRACTION PAD KIT

INSTALLATION INSTRUCTIONS

THINGS YOU'LL NEED:

- Rubbing Alcohol or Acetone
- Masking Tape
- Razor Knife
- Hair Dryer
- Roller

SURFACE PREPARATION FOR BEST ADHESION:

Using rag with rubbing alcohol or acetone, scrub surface area to remove all dirt, mildew, oil and other substances.

INSTALLATION:

STEP 1: Before applying pads, layout each location on boat to confirm proper fit.

STEP 2: Using the razor knife, carefully cut a line down the center of the paper backing. DO NOT cut through the pad material itself. This will allow the paper backing to be peeled off in two sections for a more controlled application.

STEP 3: The adhesive backing bonds best at temperatures of 70 degrees Fahrenheit or higher and in low humidity. Using a hair dryer to warm the kayak surface area just before application will help to remove any moisture and promote better adhesion. Be careful not to melt the plastic.


STEP 4: Using masking tape, secure one end of pad in desired location to prevent it from shifting.

STEP 5: Remove paper backing from non-taped end/half and carefully position it into place by applying pressure. Be careful not to pull the pad while in position. Pulling will cause the pad material to stretch and not line up correctly.

STEP 6: Once un-taped end is in position and adhered, remove backing paper (and masking tape) from other end and repeat.

STEP 7: After each pad has been fully adhered on both ends, use a roller to apply downward pressure. This will remove any air bubbles and increase the overall surface bond.

IMPORTANT: Exposure to the sun's UV rays, along with exposure to other elements of nature, will have a negative impact on any material over time. Damage that can occur to pad material due to such exposure includes material breakdown and color fading. Proper storage of your kayak when not in use will prolong the life and colors of your traction pads.

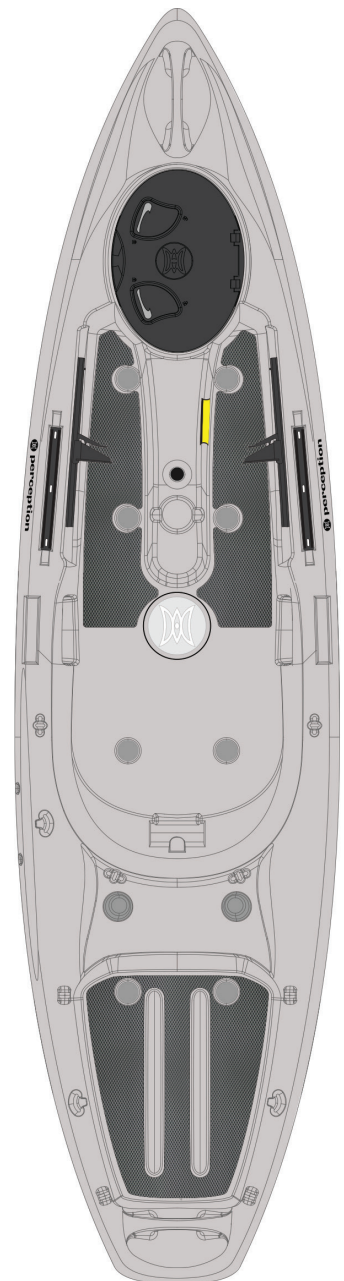

LOOKING FOR HELP? NEED ANSWERS OR ADVICE?

For quickest service, call us at 888-52-KAYAK (888-525-2925), from 9:00 a.m. to 5:00 p.m. ET.

SKU 8080023

#59504331

Pescador 12

SILENT TRACTION PAD KIT

INSTALLATION INSTRUCTIONS

THINGS YOU'LL NEED:

- Rubbing Alcohol or Acetone
- Masking Tape
- Razor Knife
- Hair Dryer
- Roller

SURFACE PREPARATION FOR BEST ADHESION:

Using rag with rubbing alcohol or acetone, scrub surface area to remove all dirt, mildew, oil and other substances.

INSTALLATION:

STEP 1: Before applying pads, layout each location on boat to confirm proper fit.

STEP 2: Using the razor knife, carefully cut a line down the center of the paper backing. DO NOT cut through the pad material itself. This will allow the paper backing to be peeled off in two sections for a more controlled application.

STEP 3: The adhesive backing bonds best at temperatures of 70 degrees Fahrenheit or higher and in low humidity. Using a hair dryer to warm the kayak surface area just before application will help to remove any moisture and promote better adhesion. Be careful not to melt the plastic.


STEP 4: Using masking tape, secure one end of pad in desired location to prevent it from shifting.

STEP 5: Remove paper backing from non-taped end/half and carefully position it into place by applying pressure. Be careful not to pull the pad while in position. Pulling will cause the pad material to stretch and not line up correctly.

STEP 6: Once un-taped end is in position and adhered, remove backing paper (and masking tape) from other end and repeat.

STEP 7: After each pad has been fully adhered on both ends, use a roller to apply downward pressure. This will remove any air bubbles and increase the overall surface bond.

IMPORTANT: Exposure to the sun's UV rays, along with exposure to other elements of nature, will have a negative impact on any material over time. Damage that can occur to pad material due to such exposure includes material breakdown and color fading. Proper storage of your kayak when not in use will prolong the life and colors of your traction pads.

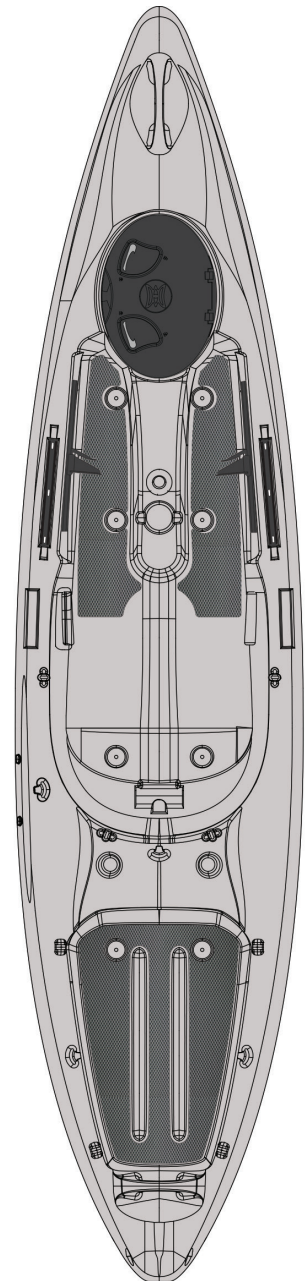

LOOKING FOR HELP? NEED ANSWERS OR ADVICE?

For quickest service, call us at 888-52-KAYAK (888-525-2925), from 9:00 a.m. to 5:00 p.m. ET.

SKU 8080024

#59504332



Perception DIY Kit

SILENT TRACTION PAD KIT

INSTALLATION INSTRUCTIONS

THINGS YOU'LL NEED:

- Rubbing Alcohol or Acetone
- Masking Tape
- Razor Knife
- Hair Dryer
- Roller

SURFACE PREPARATION FOR BEST ADHESION:

Using rag with rubbing alcohol or acetone, scrub surface area to remove all dirt, mildew, oil and other substances.

INSTALLATION:

STEP 1: Before applying pads, layout each location on boat to confirm proper fit.

STEP 2: Using the razor knife, carefully cut a line down the center of the paper backing. DO NOT cut through the pad material itself. This will allow the paper backing to be peeled off in two sections for a more controlled application.

STEP 3: The adhesive backing bonds best at temperatures of 70 degrees Fahrenheit or higher and in low humidity. Using a hair dryer to warm the kayak surface area just before application will help to remove any moisture and promote better adhesion. Be careful not to melt the plastic.


STEP 4: Using masking tape, secure one end of pad in desired location to prevent it from shifting.

STEP 5: Remove paper backing from non-taped end/half and carefully position it into place by applying pressure. Be careful not to pull the pad while in position. Pulling will cause the pad material to stretch and not line up correctly.

STEP 6: Once un-taped end is in position and adhered, remove backing paper (and masking tape) from other end and repeat.

STEP 7: After each pad has been fully adhered on both ends, use a roller to apply downward pressure. This will remove any air bubbles and increase the overall surface bond.

IMPORTANT: Exposure to the sun's UV rays, along with exposure to other elements of nature, will have a negative impact on any material over time. Damage that can occur to pad material due to such exposure includes material breakdown and color fading. Proper storage of your kayak when not in use will prolong the life and colors of your traction pads.

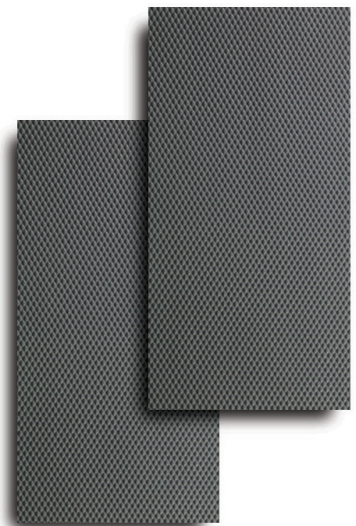

LOOKING FOR HELP? NEED ANSWERS OR ADVICE?

For quickest service, call us at 888-52-KAYAK (888-525-2925), from 9:00 a.m. to 5:00 p.m. ET.

SKU 8080027

#59504318