

# CAPTAIN'S CHAIR FRAMED SEAT ASSEMBLY & INSTALLATION GUIDE

## SEAT ASSEMBLY

### TOOLS NEEDED:





- Phillips-Head Screwdriver
- Adjustable Wrench

**STEP 1:** Remove the cardboard packaging material from the vertical supports on the seatback (A), then remove the hardware and cardboard spacers (B).

**DO NOT DISCARD THE HARDWARE** – it will be used to complete the seat assembly.

**STEP 2:** Align the vertical supports of the seatback with the pre-drilled holes located on both sides of the seat base. Secure the seatback to the seat base using the hardware from Step 1 (C).




**STEP 3:** Ensure that both side straps are not twisted, then attach them to the seatback (D). Adjust as needed for comfort and desired fit.

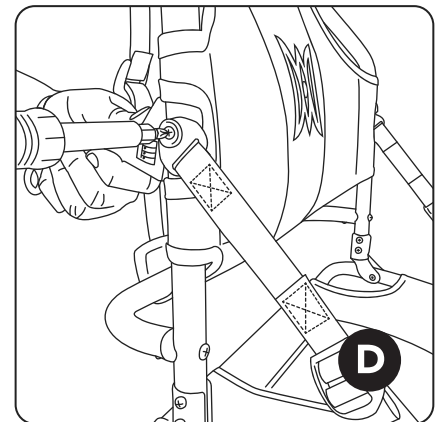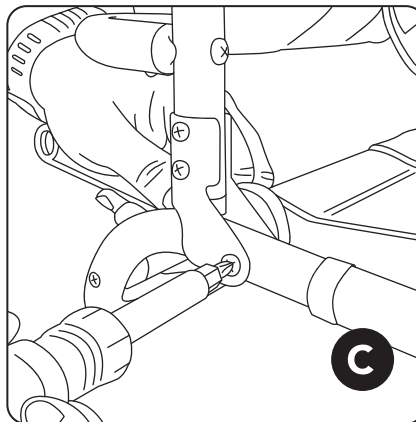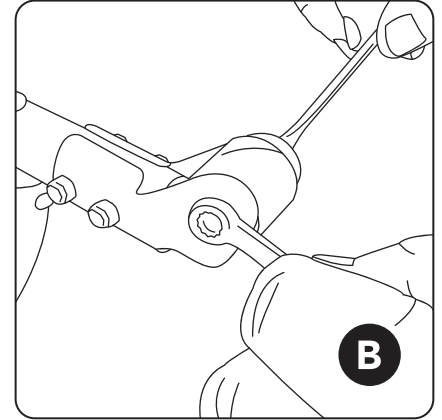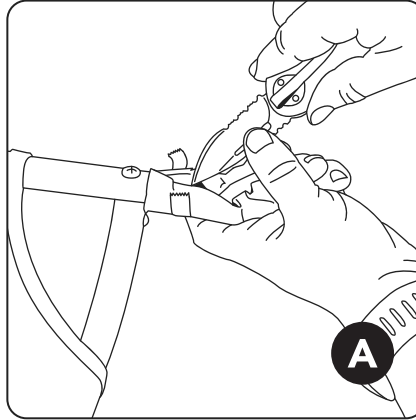

## SEAT INSTALLATION

**STEP 1:** Secure the seat in position by aligning the center wingnut on the seat base with the appropriate insert in the seat console (A), then tighten the wingnut (B).

**STEP 2:** Secure the seatback by unhooking the rear seat bungee from the clip, feeding the bungee over the seat base, then re-securing the bungee to the clip (C). Adjust as needed for optimal pedal drive use and comfort level.

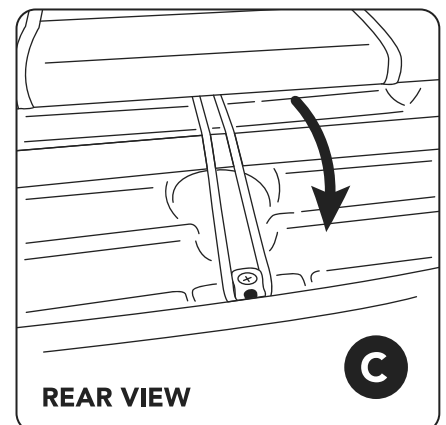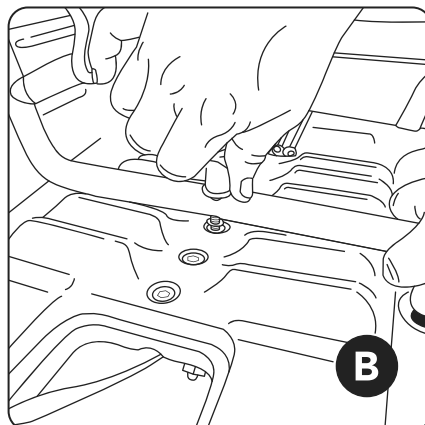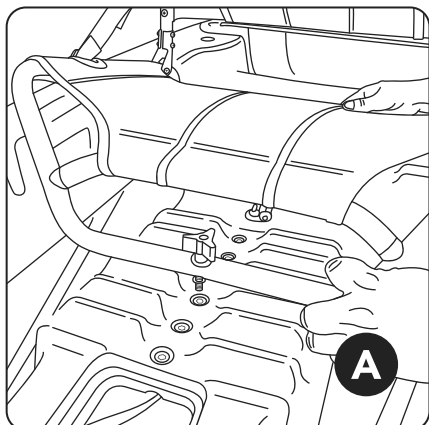

REAR VIEW