

## CAPTAIN'S CHAIR FRAMED SEAT ASSEMBLY & INSTALLATION GUIDE

### SEAT ASSEMBLY

#### TOOLS NEEDED:




- Phillips-Head Screwdriver
- Adjustable Wrench

**STEP 1:** Remove the cardboard packaging material from the vertical supports on the seatback (A), then remove the hardware and cardboard spacers (B).

**DO NOT DISCARD THE HARDWARE** – it will be used to complete the seat assembly.

**STEP 2:** Align the vertical supports of the seatback with the pre-drilled holes located on both sides of the seat base. Secure the seatback to the seat base using the hardware from Step 1 (C).

**STEP 3:** Ensure that both side straps are not twisted, then attach them to the seatback (D). Adjust as needed for comfort and desired fit.

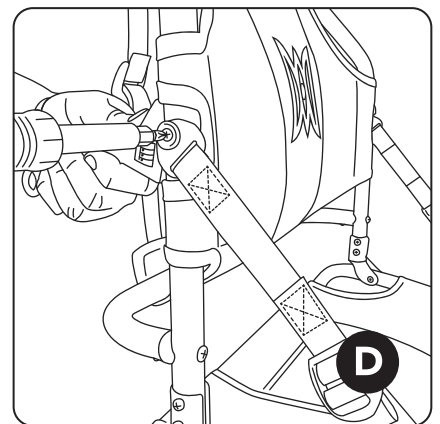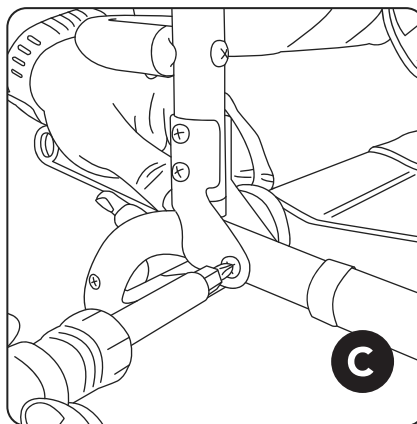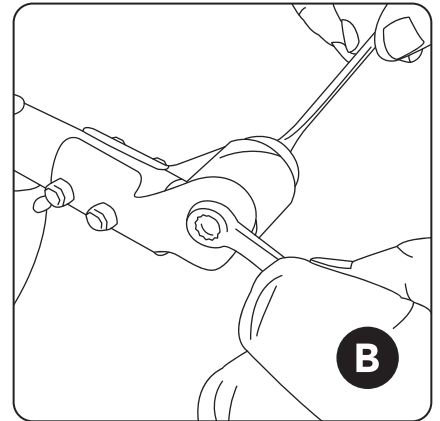

### SEAT INSTALLATION

**STEP 1:** Loosen the two wingnuts on the seat base. Align the two T-slot clamps attached to the front of the seat base with the gear tracks located in the seat console (A). Slide the seat forward to the desired position (B), then tighten the wingnuts.

**STEP 2:** Secure the seatback by unhooking the rear seat bungee from the clip, feeding the bungee over the seat base, then re-securing the bungee to the clip (C). Adjust as needed for optimal pedal drive use and comfort level.

